

(12) UK Patent Application (19) GB (11) 2 196 833 (13) A

(43) Application published 11 May 1988

(21) Application No 8721327

(22) Date of filing 10 Sep 1987

(30) Priority data

(31) 925083

(32) 30 Oct 1986

(33) US

(71) Applicant

Gentex Corporation

(Incorporated in USA-Delaware)

Main Street, Carbondale, Pennsylvania 18407, United States of America

(72) Inventor

Milton Robert White

(74) Agent and/or Address for Service

A A Thornton & Co,

Northumberland House, 303-306 High Holborn, London WC1V 7LE

(51) INT CL⁴

A42B 3/00

(52) Domestic classification (Edition J):

A3V 11C10 11D 52

(56) Documents cited

GB A 2098852

(58) Field of search


A3V

Selected US specifications from IPC sub-class A42B

(54) Improved method of making ballistic helmet and helmet made thereby

Fig 3

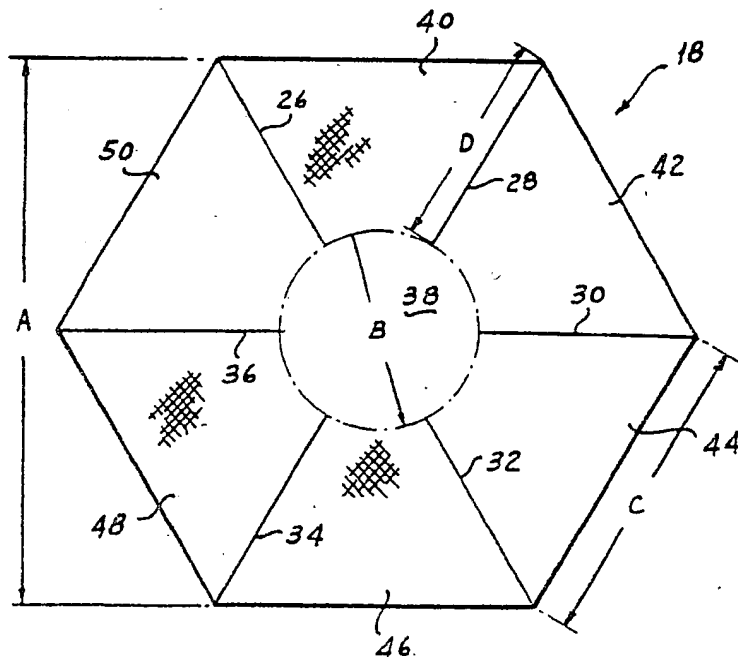(57) A method of making a ballistic helmet and a helmet made by the method in which each of the plies (18) making up the body is formed from hexagonal blank cut from ballistic cloth and provided with slits (26-36) extending from the apices thereof toward the centre to form a central area (38) and segments (40-50) extending from the central area. As the blanks are laid up in a mould cavity the segments (40-50) overlap to provide first portions which overlap and second portions which do not. As successive blanks are laid up they are rotated slightly to stagger the portions of adjacent plies. As the laying up operation proceeds, progressively smaller blanks are laid up between adjacent relatively larger blanks.



BEST AVAILABLE COPY

GB 2 196 833 A

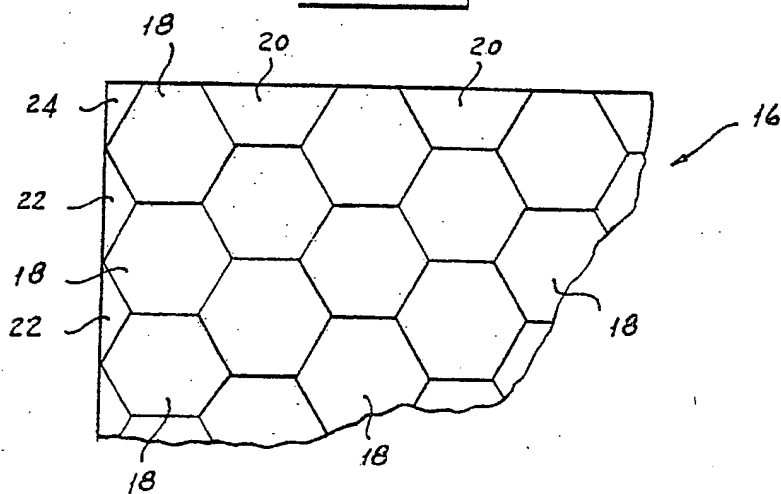
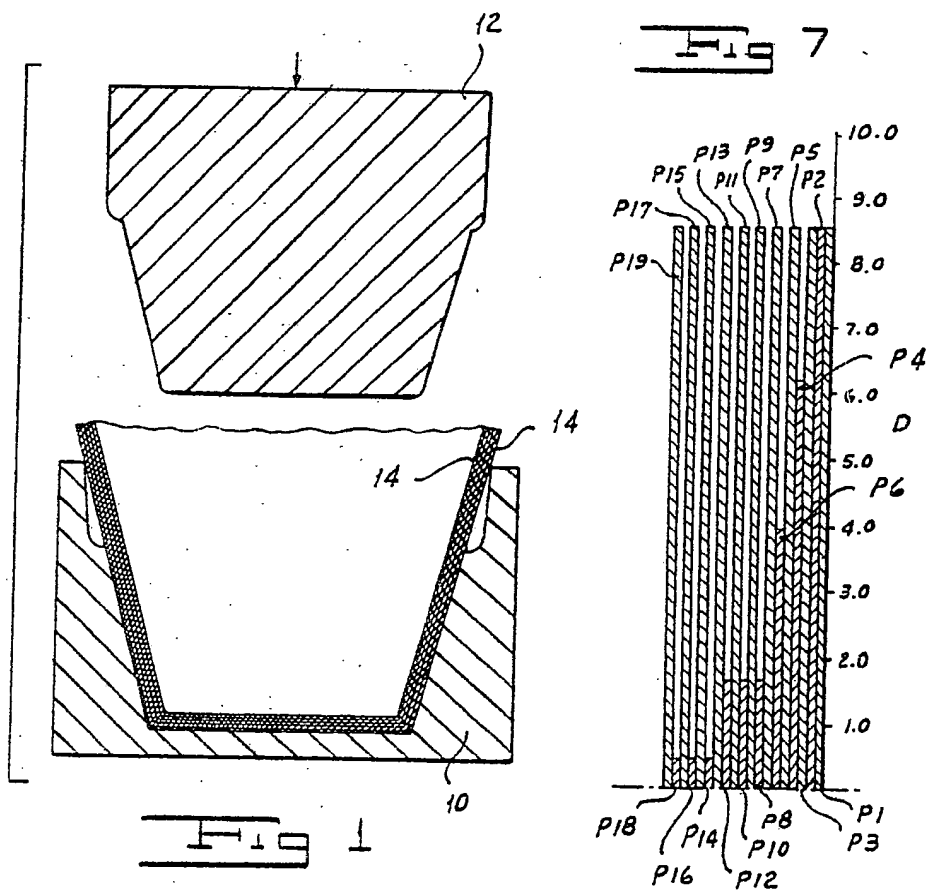
FIG 2**FIG 7**

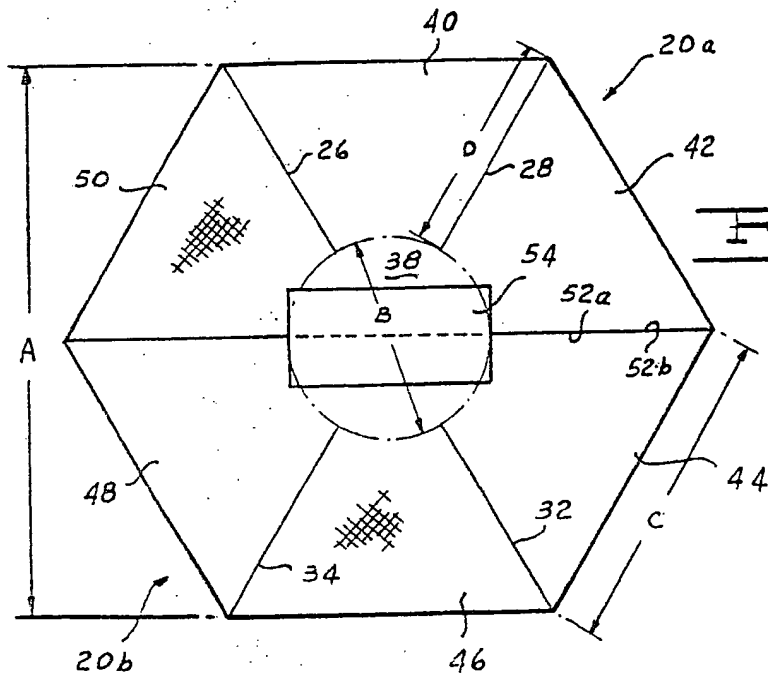
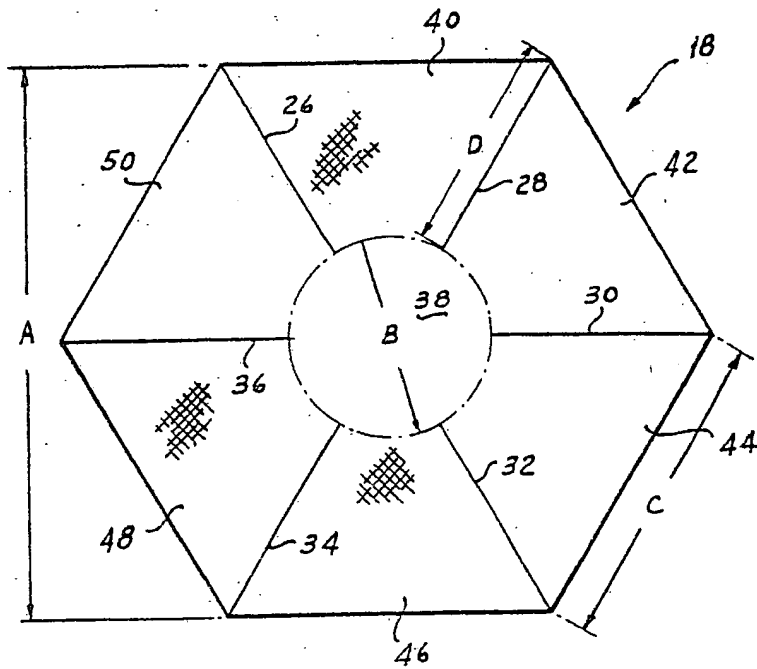
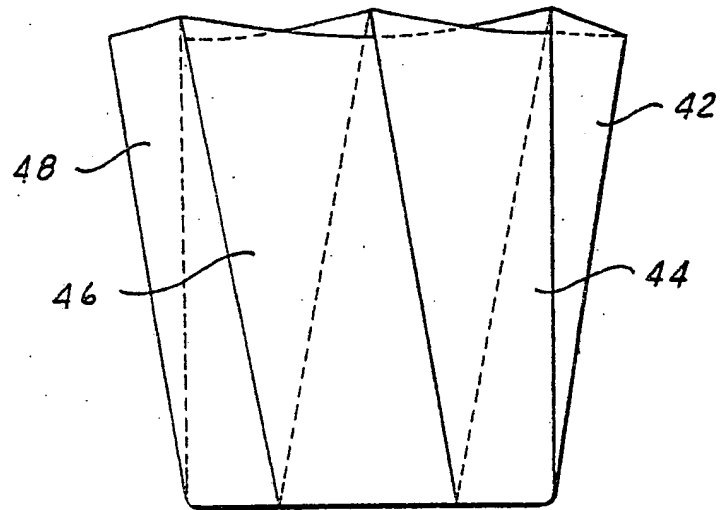
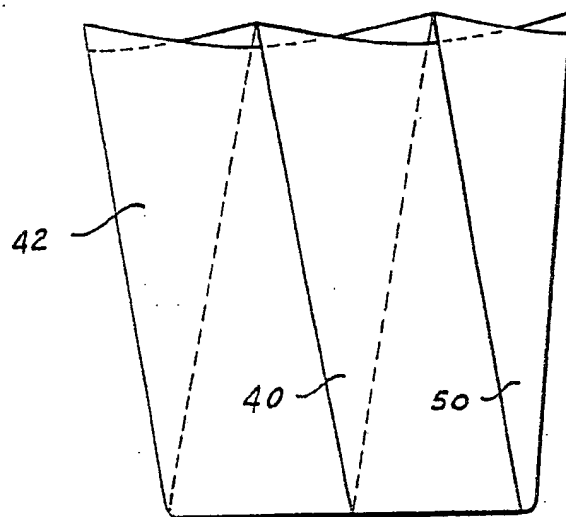
FIG 3

Fig 5Fig 6

SPECIFICATION

Improved method of making ballistic helmet and helmet made thereby

5 The invention is in the field of ballistic helmets and more particularly relates to an improved 5
method of making helmets which makes most efficient use of the base ballistic material.

Ballistic helmets are well known in the prior art for use by persons to protect them against
serious injury from shrapnel and other missiles. Most modern ballistic helmets are made from a
plurality of plies of ballistic material which are laid up in a mold and shaped to the configuration
10 of the helmet. 10

A material which is eminently suited for use in making ballistic helmets is one which is made
from one of the "aramids" which include aromatic polyimide resins developed by E.I. duPont de
Nemours and Company and sold under the trademarks "Kevlar" and "Nomex". This material is
relatively expensive. In addition, a considerable quantity of material is used in making up a
15 helmet shell owing to the fact that a relatively large number of plies are required to produce a 15
helmet affording the desired degree of protection. It will be apparent that the most efficient use
of the available materials in making up the individual plies is highly desirable.

Generally speaking, two methods are known in the prior art for forming blanks from which the
individual plies of the helmet body can be made. In the first of these methods which is
20 exemplified by the disclosure of U.S. patent 2,532,442, individual unitary blanks are custom cut 20
from the ballistic material prior to being laid up in the forming mould. While this method results
in a high quality method having good ballistic properties, it does not make efficient use of the
basic material, much of which is wasted in the custom cutting process. In the second method
which is exemplified by U.S. patent 4,596,056, a plurality of individual pieces are joined together
25 by any suitable means to form the blank which is laid up into the mould. While this method 25
permits a more efficient use of the available base material it is relatively complicated and time
consuming. In addition, under certain circumstances the pieced up plies have not met customer
specifications.

The object of the present invention is to provide an improved method of making ballistic
30 helmets, and to provide a ballistic helmet made by the improved method. 30

The preferred embodiment of the invention make efficient use of the base material, and enable
ballistic helmets to be made rapidly and expeditiously whilst at the same time satisfying the
customer's specifications.

The preferred embodiment of the invention provides a method of making ballistic helmets
35 without sacrificing any degree of protection afforded by the helmet. 35

The invention will be better understood from the following description of a preferred embodi-
ment thereof, given by way of example only, reference being had to the accompanying drawings
in which like reference characters are employed to indicate like parts in the various views and
wherein:

40 Figure 1 is a schematic view of a mould used in a method of making ballistic helmets; 40

Figure 2 is a fragmentary view of a sheet of the base ballistic material illustrating the manner
in which the ply blanks are cut;

Figure 3 is a plan view of one form of ply blank which may be employed;

Figure 4 is a plan view of an alternative form of ply blank which may be employed;

45 Figure 5 is an elevation of a configuration of a blank after it has been formed in the mould of 45
Figure 1;

Figure 6 is an elevation of the blank of Figure 5 rotated through approximately 60° about the
vertical axis thereof; and

FIGURE 7 is a fragmentary partially schematic view illustrating the laid up assembly of plies of
50 one form of ballistic helmet made by my improved method of forming ballistic helmets. 50

Referring now to the drawing, as will be apparent from the description hereinbelow, in making
a ballistic helmet body pursuant to my improved method, I lay up a plurality of superposed plies
14 in the cavity of a first die 10. When a predetermined number of plies have been laid up, the
complementary die member 12 is moved under pressure into the cavity of the die 10 to form
55 the plies to the shape of the helmet body. This operation of moving the dies 10 and 12 into 55
cooperative relationship may be carried out one or more times in the course of formation of a
complete helmet body.

In practice of my method of making ballistic helmets, I make optimum use of the base ballistic
fabric. For example, with an available sheet, indicated generally by the reference character 16, of
60 a fabric made from a suitable material, such for example as "Kevlar", I cut the individual blanks 60
18 from the sheet. I have discovered that a hexagonal shape of blank, both is a very nearly
ideal shape for forming a helmet ply and also permits of the most efficient use of the material of
the sheet 16.

It will be noted that in the course of cutting the sheet to form the blanks 18 along one edge
65 thereof I leave remnant pieces 20 which are in the form of a hemihexagon. Along the other edge 65

of the sheet 16 I leave remnant pieces 22 and 24.

- In adapting a blank 18 to serve as a ply of a ballistic helmet, I cut the blank 18 along lines 26, 28, 30, 32, 34 and 36 extending from the apices of the hexagon inwardly toward the center thereof. Each of the cuts extends for a distance D from an apex toward the center of the blank to result in a generally circular center portion 38 having a diameter B and segments 40, 42, 44, 46, 48 and 50 extending outwardly from the center portion 38. I select the dimensions A, which is the distance between a pair of parallel sides of the hexagon, and C, which is the length of one of the hexagon sides, in accordance with the size of the ply at that particular location in the helmet body. 5
- In the practice of my method, I am also able to make full use of the remnant pieces 20 and some use of the remnants 22 and 24. As can be seen by reference to FIGURE 4, a pair of remnants, 20a and 20b, may be placed with their longest sides in abutting relationship to form a full hexagon. With the parts in this position, a piece 54 of ballistic material cut from one of the remnants 22 and 24, for example, is secured to the two remnants 20a and 20b by any suitable means, such for example by ultrasonic welding. It will readily be appreciated that the piece 54 has a length which is substantially equal to the diameter B and is placed on the two remnants, 20a and 20b, so that it extends over the full length of the diameter B before being welded in place. When it has been welded in place, the resulting blank has the same general configuration as does the blank shown in FIGURE 3. 10
- While a helmet shell made entirely of the blanks of the type shown in FIGURE 4 might not be acceptable to certain users, the helmet incorporating a minimum number of such blanks would be acceptable. 15
- Referring now to FIGURES 5 and 6, I have shown the configuration of a blank after having been laid up in the mold member 10. In this condition of a blank, it will readily be seen that adjacent segments 40, 42, 44, 46 and 48 overlap each other with, for example, the segment 44 overlapping the segment 46, the segment 46 overlapping segment 48, and so forth. The amount of overlap is such that each blank or ply in this condition includes first portions which are overlapped so as to be of double thickness and second portions which are not overlapped so as to be of only single thickness. Owing to that fact, I rotate successive blanks or plies as they are laid up in the mold so as to ensure that the second unlapped portions of one ply are covered by first or overlapped portions of other plies. More specifically, I rotate each successive layer through such a distance that the fourth layer registers with the first. 20
- Before laying up the various plies in the mold, I calculate the sizes of the various plies at various locations necessary to give the required thickness of ballistic material at that location in the finished helmet. In performing this calculation a series of circles were struck at different distances from a vertical center line on the top of the crown of a finished helmet having the desired configuration. Next, a calculation was made as to what the needs would be in perimeter inches at that particular area of the helmet to give the desired material thickness. 25
- It will readily be appreciated that the number of plies, the dimensions of the various plies and the manner of laying the plies up varies with the type and size of the helmet. By way of example, in the table below I have outlined the dimensions of nineteen plies which required to make up one configuration of helmet or helmet preform. 30
- 35
- 40

	PLY NO.	A	B	C	D	
			(I N C H E S)			
5	1	20	6	11.548	8.548	5
	2	20	6	11.548	8.548	
	3	20	6	11.548	8.548	
10	4	16	6	9.237	6.237	10
	5	20	6	11.548	8.548	
15	6	12	6	6.928	3.928	15
	7	20	6	11.548	8.548	
20	8	8	6	4.619	1.619	20
	* 9	20	6	11.548	8.548	
25	10	8	6	4.619	1.619	25
	* 11	20	6	11.548	8.548	
	12	8	6	4.619	1.619	
30	13	20	6	11.548	8.548	30
	14	6	6	3.464	0.464	
35	15	20	6	11.548	8.548	35
	16	6	6	3.464	0.464	
40	17	20	6	11.548	8.548	40
	18	6	6	3.464	0.464	
45	19	20	6	11.548	8.548	45

* May be according to FIGURE 4.

50 From the discussion thus far, it will readily be apparent that my improved method is especially adapted for use where kits containing the blanks necessary to make up a particular model and size of helmet are supplied to the user. For example, where a helmet preform of the type adapted to be made up with the blanks of Table 1 is to be made, the operator is supplied with 55 a kit containing those blanks in the correct number and sequence. Multiple kits are stacked with a separator of any suitable type between each kit.

In practice of my improved method of making a ballistic helmet preform, each of the plies is formed in the manner described hereinabove from ballistic cloth which preferably is an aramid resin readily available from a number of suppliers under different trade names. In practicing my 60 method, the material of which the plies are made is coated on both sides with equal amounts of laminating resin which may, for example, be a catalyzed system composed of 50% phenol formaldehyde and 50% polyvinyl butyral resins.

By way of example, in the formation of a preform according to Table I with molding apparatus illustrated in FIGURE 1, to produce the lay-up illustrated in FIGURE 7, the operator first folds the 65 first blank or outer disc pinwheel generally to the configuration of FIGURES 5 and 6, taking care

that all flaps or overlapping portions of the folds run in the same direction. The folded blank is then placed in the mold member 10. Next, the blank which is to form ply 2 is folded, making sure that all the flaps run in the same direction and this folded blank is placed in the mold member 10 over the first blank with the second and succeeding plies being rotated a sufficient amount relative to the first so that every fourth blank registers. The next six plies up to ply 8 are positioned in the mold and the mold member 12 is moved into the cavity of the mold member 10. After the next four plies are placed in the mold cavity in the manner described, the press is again operated. The next four plies are inserted in place and the press is operated. Then the last three plies are positioned and the mold plug 12 is moved into the cavity of the member 10. When that has been done the completed preform is sealed around the edges thereof with a heat gun. The completed preform may then be removed from the mold member 10.

It will be seen that I have accomplished the objects of my invention. I have provided an improved method of making ballistic helmets and a ballistic method made thereby. My method makes most efficient use of the base material of which the helmet is formed. My method is rapid and expeditious. My method makes efficient use of the base material while at the same time satisfying all of the user's specifications. My method makes most efficient use of the base material without sacrificing any degree of protection to the wearer.

It will be understood that certain features and subcombinations are of utility and may be employed without reference to other features and subcombinations. This is contemplated by and is within the scope of my claims. It is further obvious that various changes may be made in details within the scope of my claims without departing from the spirit of my invention. It is, therefore, to be understood that my invention is not to be limited to the specific details shown and described.

CLAIMS

1. A method of making a ballistic helmet body including the steps of forming a plurality of ballistic material blanks of regular polygonal shape, slitting said blanks along lines extending for a predetermined distance from the apices of the polygon toward the center thereof to form a generally circular center area surrounded by a plurality of segments, laying up said blanks in a mold member with adjacent segments of each blank overlapping and subjecting said laid up blanks to pressure to form said body.

2. A method as in Claim 1 in which each of said laid up blanks has first portions which are overlapped and second portions which are not overlapped, said laying up step including the step of rotating successive blanks as they are laid up to stagger the portions of one piece with respect to the portions of an adjacent piece.

3. A method as in Claim 1 in which said cutting step comprises cutting a plurality of first relatively large blanks and cutting a plurality of progressively smaller second blanks, said laying up step comprising laying up second blanks of progressively smaller size between adjacent first blanks as said laying up operation progresses.

4. In a method of making a ballistic helmet the step of cutting a plurality of blanks of hexagonal shape from a sheet of ballistic material.

5. A method of making a ballistic helmet body from ballistic sheet material including the steps of cutting a plurality of blanks of hexagonal shape from said sheet material, slitting each of said hexagonal blanks along lines extending for a predetermined distance from the apices thereof toward the center thereof to form a generally circular central area surrounded by a plurality of segments, laying up said blanks in a mold cavity with adjacent segments of each blank overlapping and subjecting said laid up blanks to pressure to form said body.

6. A method as in Claim 5 in which each of said laid up blanks has first portions which are overlapped and second portions which are not overlapped, said laying up step including the step of rotating successive blanks as they are laid up to stagger the portions of one blank with respect to the portions of an adjacent blank.

7. A method as in Claim 6 in which said cutting step comprises cutting a plurality of first relatively large blanks and cutting a plurality of second progressively smaller blanks, said laying up step comprising laying up second blanks of progressively smaller size between adjacent first blanks as said laying up operation progresses.

8. A method as in Claim 7 in which said slitting operation is carried out so that the central areas of said blanks are all of the same size.

9. A method as in Claim 5 in which said cutting step comprises cutting a plurality of relatively large first blanks and cutting a plurality of progressively smaller second blanks, said laying up step comprising laying up second blanks of progressively smaller size between adjacent first blanks as said winding operation progresses.

10. A method as in Claim 5 in which said laying up step comprises laying up progressively smaller blanks as said laying up step progresses.

11. A method as in Claim 5 in which a sheet of said material has a straight edge whereby

said cutting operation produces remnants of hemihexagonal shape, said method including the step of joining a pair of said remnants to form one of said blanks.

12. A method as in Claim 11 in which said joining step comprises adhering a piece of material to said remnants.

5 13. A ballistic helmet body including in combination a plurality of plies of ballistic material, each of said plies being formed from a hexagonal blank having slits extending from the apices thereof toward the center to form a central generally circular area and a plurality of segments extending from said central area, adjacent segments of each of said plies overlapping to provide each ply with first portions which overlap and with second portions which do not overlap. 5

10 14. A ballistic helmet as in Claim 13 in which the portions of one ply are staggered with relation to the portions of an adjacent ply. 10

15 15. A ballistic helmet as in Claim 14 in which said plurality of plies includes a number of plies which decrease in size from the outer surface toward the inside of said body.

16. A ballistic helmet as in Claim 13 in which said plurality of plies includes a number of first relatively large plies and a plurality of second relatively small plies, each of said second plies being sandwiched between a pair of first plies. 15

17. A ballistic helmet as in Claim 16 in which said number of second plies includes plies which decrease in size from the outside to the inside of said body.

18. A ballistic helmet as in Claim 17 in which the portions of one ply are staggered with relation to the portions of an adjacent ply. 20

19. A method of making a ballistic helmet substantially as herein described with reference to the accompanying drawings.

20. A ballistic helmet substantially as herein described with reference to the accompanying drawings.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.